


Cisco ASA IPSec VPN Alternative

logintc.com/docs/connectors/cisco-asa-ipsec-alt

The LoginTC RADIUS Connector is a complete two-factor authentication virtual machine packaged to run within your corporate network. The LoginTC RADIUS Connector enables Cisco ASA to use LoginTC for the most secure two-factor authentication. For an alternate method using Challenge Response then you may be interested in: [Two factor authentication for Cisco ASA IPSec VPN](#).

User Experience


After entering the username and password into the IPSec client, an authentication request is sent to the user's mobile device using a push notification. The user simply needs to approve the request for second factor.

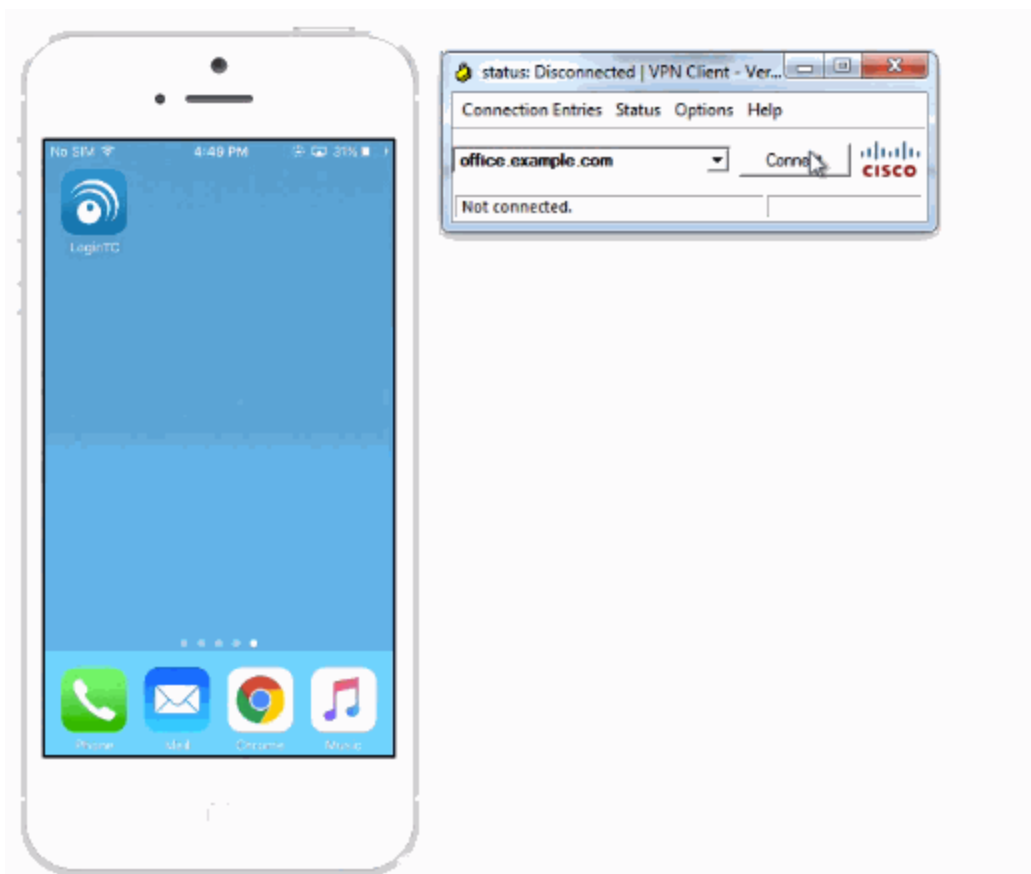

Video Instructions

Watch Video At: <https://youtu.be/n76rvDIBo-g>

Architecture

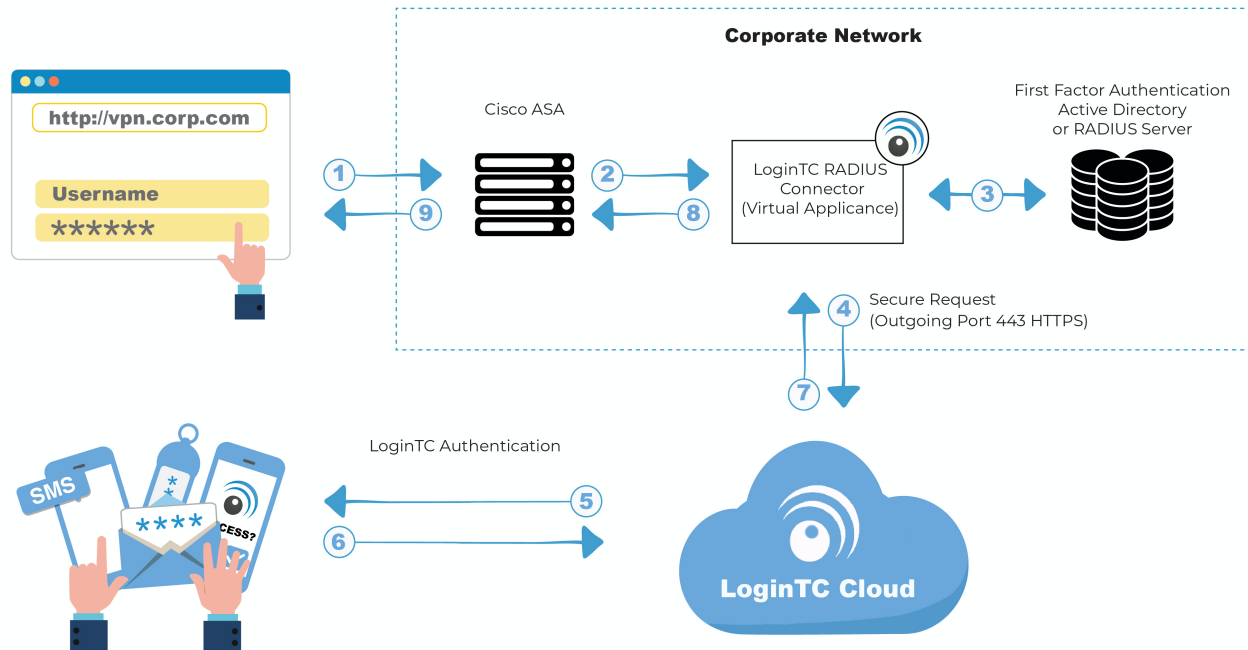

Authentication Flow

1. A user attempts access with their existing Cisco AnyConnect client with username / password
2. A RADIUS authentication request is sent to the LoginTC RADIUS Connector
3. The username / password is verified against an existing first factor directory (LDAP, Active Directory or RADIUS)
4. An authentication request is made to LoginTC Cloud Services
5. Secure push notification request sent to the user's mobile or desktop device
6. User response (approval or denial of request) sent to LoginTC Cloud Services
7. The LoginTC RADIUS Connector polls until the user responds or a timeout is reached
8. RADIUS Access-Accept sent back to Cisco ASA
9. User is granted access to Cisco ASA

Compatibility

Cisco ASA appliance compatibility:

- Cisco ASA 5505
- Cisco ASA 5506-X Series
- Cisco ASA 5508-X
- Cisco ASA 5510-X
- Cisco ASA 5512-X
- Cisco ASA 5515-X
- Cisco ASA 5516-X

- Cisco ASA 5525-X
- Cisco ASA 5545-X
- Cisco ASA 5555-X
- Cisco ASA 5585-X Series
- Cisco appliance supporting RADIUS authentication

Appliance not listed?

We probably support it. [Contact us](#) if you have any questions.

Compatibility Guide

Any other Cisco appliance which have configurable RADIUS authentication are supported.

Prerequisites

Before proceeding, please ensure you have the following:

- [LoginTC Admin Panel](#) account
- Computer virtualization software such as [VMware ESXi](#), [VirtualBox](#), or [Hyper-V](#)
- Virtual Machine requirements:
 - 2048 MB RAM
 - 8 GB disk size

Create Application

Start by creating a LoginTC Application for your deployment. An Application represents a service (e.g. An application is a service (e.g., VPN or web application) that you want to protect. e) that you want to protect with LoginTC.


Create a LoginTC Application in [LoginTC Admin Panel](#), follow [Create Application Steps](#).

If you have already created a LoginTC Application for your deployment, then you may skip this section and proceed to [Installation](#).


Installation

1. Import the virtual appliance your computer virtualization software
[Instructions for Hyper-V](#)
2. Ensure that LoginTC RADIUS CONNECTOR has a virtual network card
3. Start the virtual appliance


4. You will be with a console prompt:

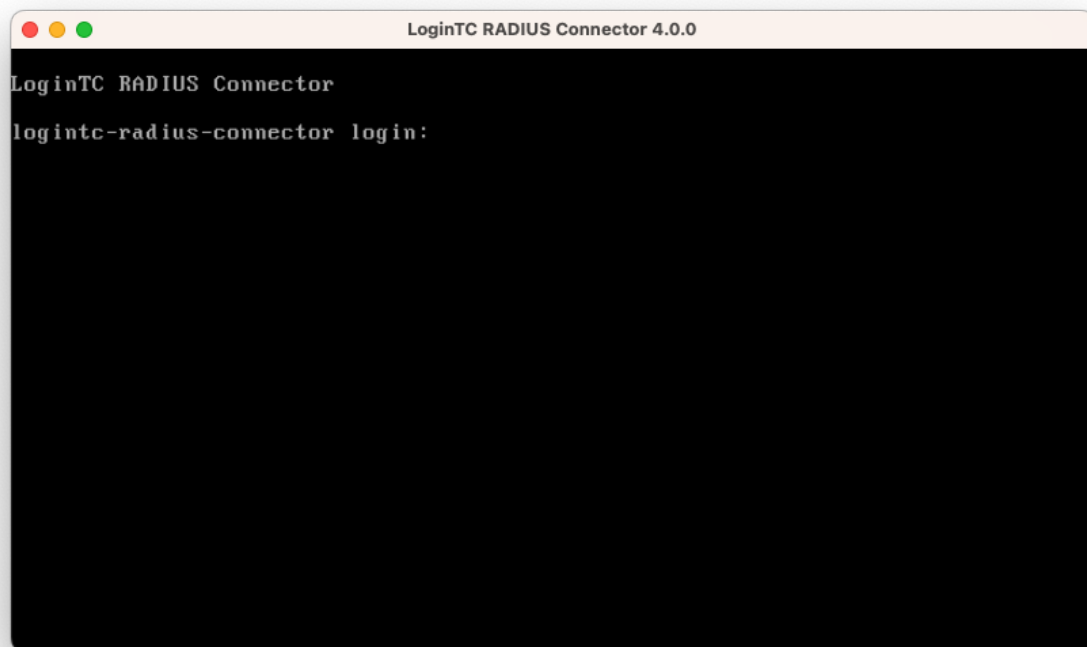

5. Login using the username **logintc-user** and default password **logintcradius**:

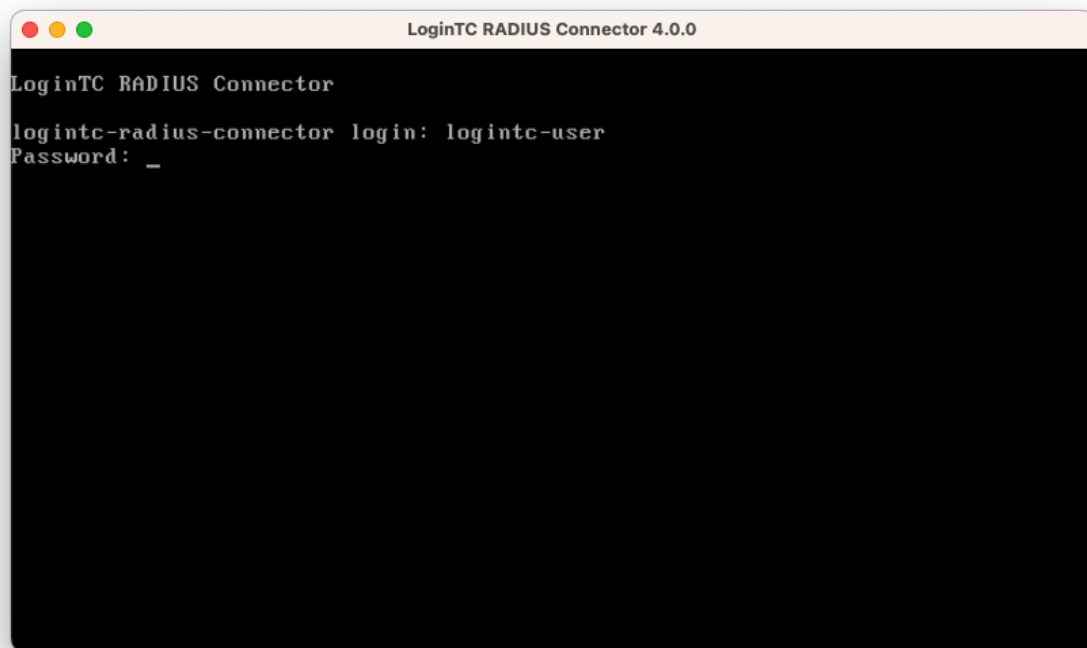

6. Once logged in type **setup**:

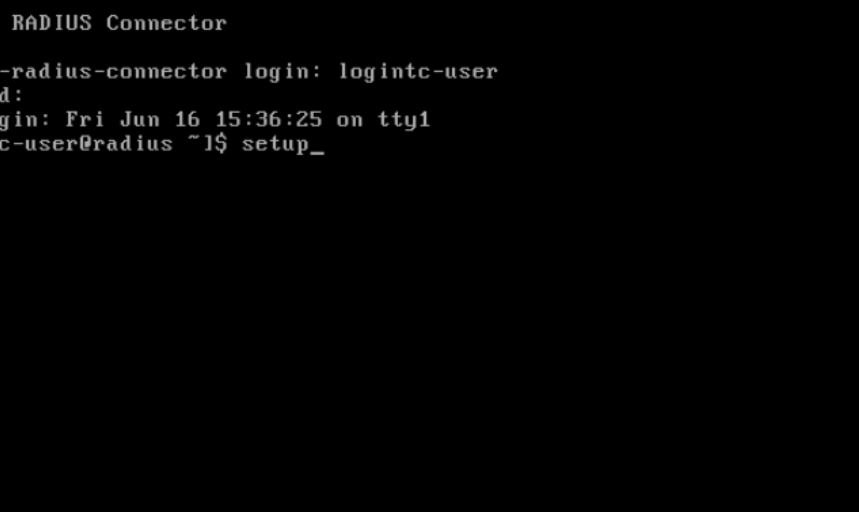


```
LoginTC RADIUS Connector

logintc-radius-connector login: logintc-user
Password:
Last login: Fri Jun 16 15:36:25 on tty1
logintc-user@radius ~l$ setup_
```

7. Follow the on-screen prompt to setup a new password for **logintc-user**:

[illegible]

8. By default the appliance network is not configured. Manually configure the network by typing **1** and hit enter:

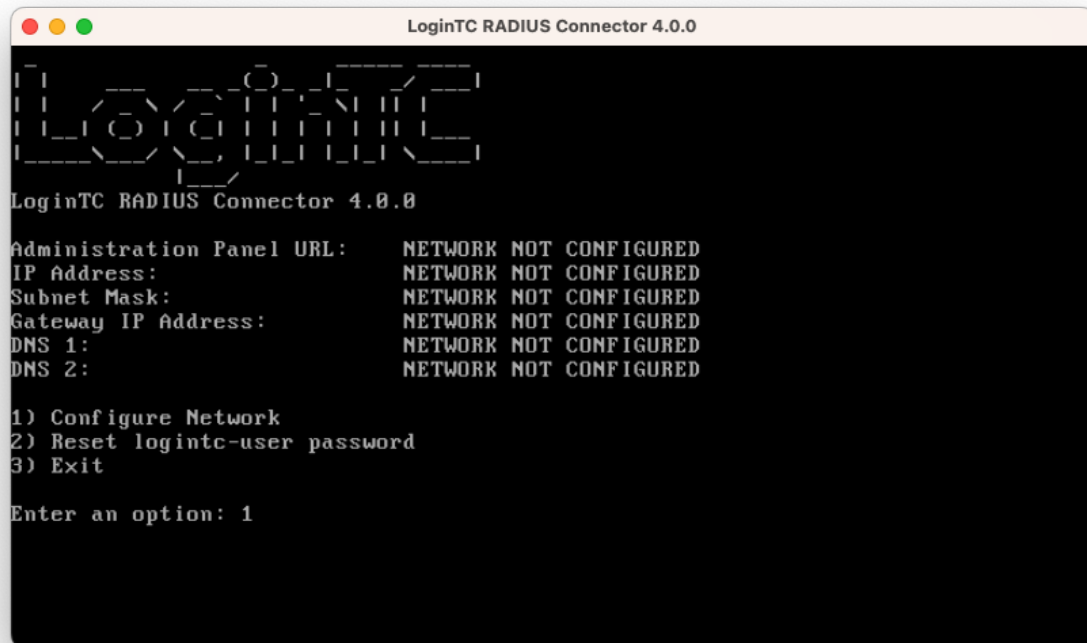

```

LoginTC RADIUS Connector 4.0.0

LoginTC RADIUS Connector 4.0.0


Administration Panel URL:  NETWORK NOT CONFIGURED
IP Address:                NETWORK NOT CONFIGURED
Subnet Mask:               NETWORK NOT CONFIGURED
Gateway IP Address:        NETWORK NOT CONFIGURED
DNS 1:                     NETWORK NOT CONFIGURED
DNS 2:                     NETWORK NOT CONFIGURED

1) Configure Network
2) Reset logintc-user password
3) Exit

Enter an option: 1

```

9. Follow the on-screen prompts to setup the network. When done, type **1** and enter to confirm the settings:

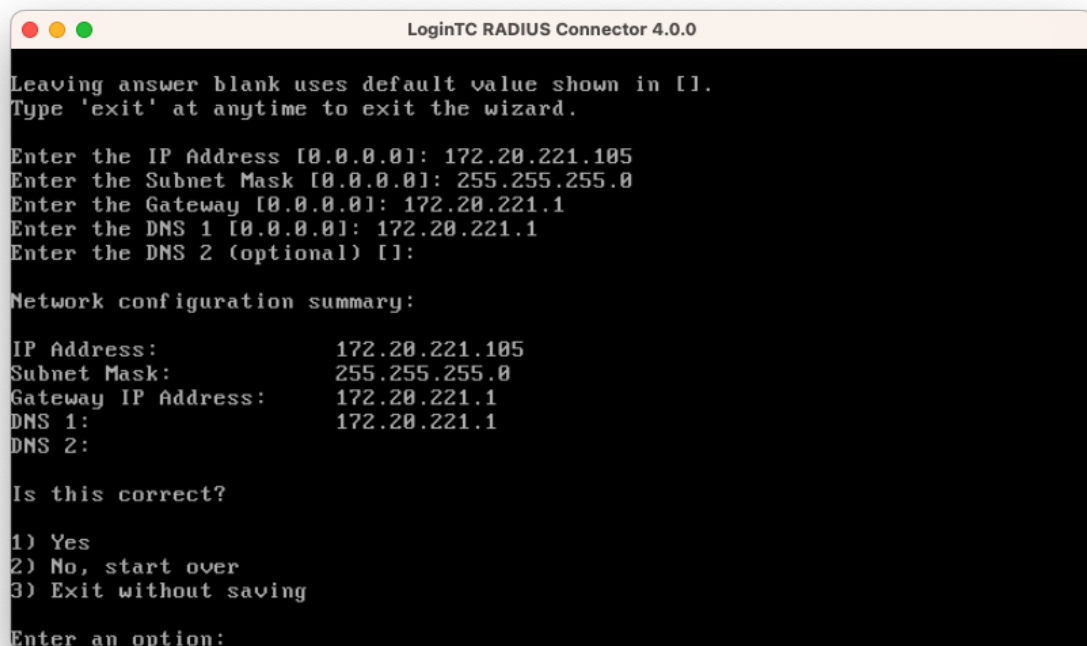

```

LoginTC RADIUS Connector 4.0.0

Leaving answer blank uses default value shown in [].
Type 'exit' at anytime to exit the wizard.

Enter the IP Address [0.0.0.0]: 172.20.221.105
Enter the Subnet Mask [0.0.0.0]: 255.255.255.0
Enter the Gateway [0.0.0.0]: 172.20.221.1
Enter the DNS 1 [0.0.0.0]: 172.20.221.1
Enter the DNS 2 (optional) []:

Network configuration summary:

IP Address:                172.20.221.105
Subnet Mask:               255.255.255.0
Gateway IP Address:        172.20.221.1
DNS 1:                     172.20.221.1
DNS 2:


Is this correct?

1) Yes
2) No, start over
3) Exit without saving

Enter an option: 1

```

10. You will be presented with the network configuration which includes the URL to connect to the appliance from a web browser (example <https://172.20.221.105:8443>):

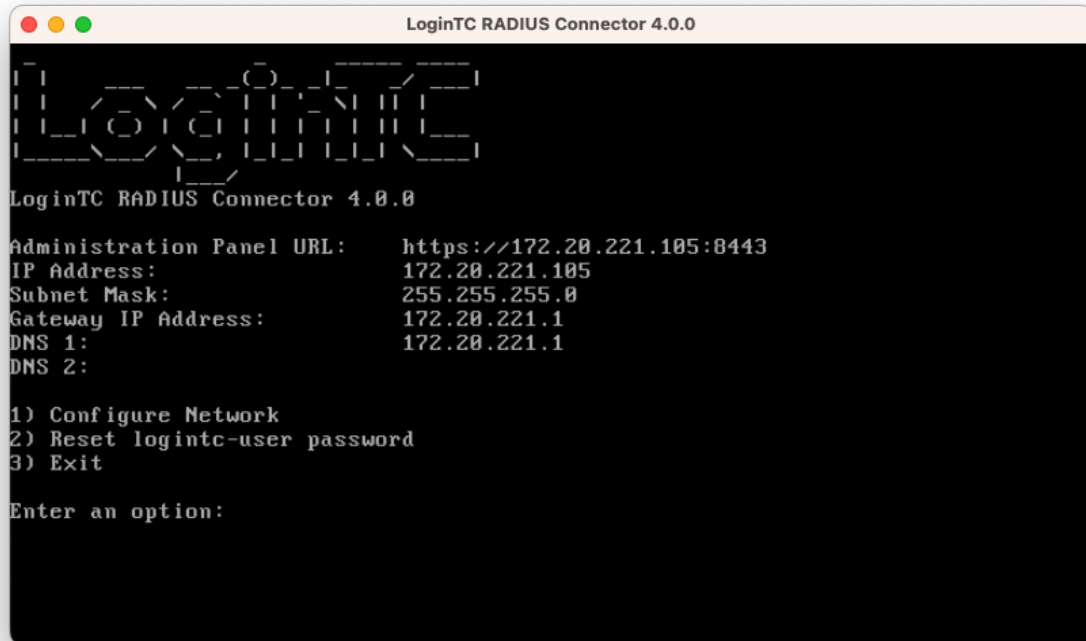

```

LoginTC RADIUS Connector 4.0.0

LoginTC
-----
LoginTC RADIUS Connector 4.0.0

Administration Panel URL:  https://172.20.221.105:8443
IP Address:                172.20.221.105
Subnet Mask:               255.255.255.0
Gateway IP Address:        172.20.221.1
DNS 1:                     172.20.221.1
DNS 2:

1) Configure Network
2) Reset logintc-user password
3) Exit

Enter an option:
```

11. Navigate to the URL shown in the console dashboard (example: <https://172.20.221.105:8443>):
-



LoginTC RADIUS Connector

Username

Password

Log in

Version 0.1.0-SNAPSHOT

12. Login using the username **logintc-user** and the password that was set in the initial setup:
-



LoginTC RADIUS Connector

Username

logintc-user

Password

Log in

Version 0.1.0-SNAPSHOT

13. Link to your existing LoginTC organization. The 64-character Organization API Key is found on the LoginTC Admin Panel under **Settings** >page **API** >page **Click to view**, also see [Organization API Key](#):
-



Welcome to LoginTC RADIUS Connector!

Organization API Key

The 64-character organization API key is found on the LoginTC Admin Panel Settings page.

[Change LoginTC API Host](#)

HTTP Proxy ☐ Enabled ☒ Disabled

Next

[Log out](#)

14. Confirm the LoginTC organization name and click **Continue to LoginTC RADIUS Connector**:
-



Organization Found:

Example Inc.

Continue to LoginTC RADIUS Connector

[Log out](#)

15. If you have an existing LoginTC RADIUS Connector you wish to import configurations then click **Yes, import configurations from an existing LoginTC RADIUS Connector**, otherwise click **No, continue to the administration panel**:
-



Import configuration from an existing LoginTC RADIUS Connector?

If you have already deployed an older version of the LoginTC RADIUS Connector then you can attempt to import the configurations. The criteria for a successful import are:

- ☒ Network Connectivity
- ☒ Valid account credentials
- ☒ LoginTC RADIUS Connector v2.7.1 - v3.0.7
- ☒ Configurations using Applications (not Domains)

Yes, import configurations from an existing LoginTC RADIUS Connector


No, continue to the administration panel

[Log out](#)

NOTE

These instructions assume a new environment. For a complete 2.X / 3.X to 4.X upgrade guide: [LoginTC RADIUS Connector Upgrade Guide](#)

16. Now you are ready to use the LoginTC RADIUS Connector:

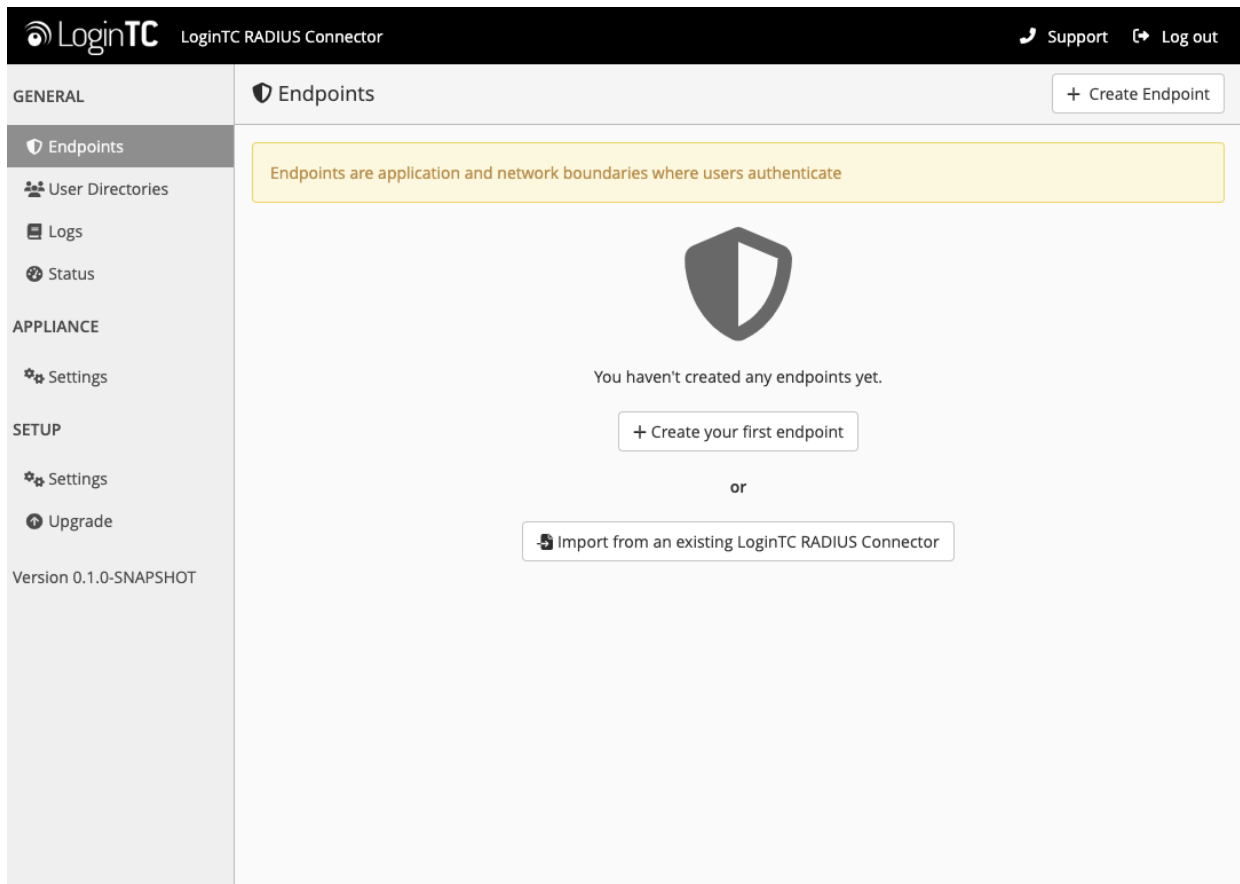

The LoginTC RADIUS Connector runs Linux with SELinux. A firewall runs with the following open ports:

Port	Protocol	Purpose
1812	UDP	RADIUS authentication
443	TCP	API traffic
8443	TCP	Web interface
123	UDP	NTP, Clock synchronization (outgoing)

Note: Username and Password `logintc-user` is used for SSH and web access. The default password is `logintcradius`. You will be asked to change the default password on first boot of the appliance.

Configuration

Endpoints describe how the appliance will authenticate your RADIUS-speaking device with an optional first factor and LoginTC as a second factor. Each endpoint has **4 Sections**:

1. LoginTC Settings

This section describes how the appliance itself authenticates against LoginTC Admin Panel with your LoginTC Application. Only users that are part of your organization and added to the domain configured will be able to authenticate.

2. User Directory

This section describes how the appliance will conduct an optional first factor. Either against an existing LDAP, Active Directory or RADIUS server. If no first factor is selected, then only LoginTC will be used for authentication.

3. Challenge Strategy / Passthrough

This section describes whether the appliance will perform a LoginTC challenge for an authenticating user. The default is to challenge all users. However with either a static list or Active Directory / LDAP Group you can control whom gets challenged to facilitate seamless testing and rollout.

4. Client Settings

This section describes which RADIUS-speaking device will be connecting to the appliance and whether to encrypt API Key, password and secret parameters.

The **web interface** makes setting up an endpoint simple and straightforward. Each section has a **Test** feature, which validates each input value and reports all potential errors. Section specific validation simplifies troubleshooting and gets your infrastructure protected correctly faster.

First Endpoint

Close the console and navigate to your appliance **web interface** URL. Use username **logintc-user** and the password you set upon initial launch of the appliance. You will now configure the LoginTC RADIUS Connector.

Create a new endpoint file by clicking **+ Create your first endpoint**:

LoginTC

LoginTC RADIUS Connector

Support

Log out

GENERAL

Endpoints

Endpoints

User Directories

Logs

Status

APPLIANCE

Settings

SETUP

Settings

Upgrade

Version 4.0.0

Endpoints

Create Endpoint

Endpoints are application and network boundaries where users authenticate

You haven't created any endpoints yet.

Create your first endpoint

or

Import from an existing LoginTC RADIUS Connector

LoginTC Settings

A list of available Applications will be displayed from your LoginTC organization. Select which LoginTC **Application** to use:

LoginTC

LoginTC RADIUS Connector

Support

Log out

GENERAL

Endpoints / Create / LoginTC Application

Step 1 of 4

Cancel

Endpoints

User Directories

Logs

Status

APPLIANCE

Settings


SETUP

Settings

Upgrade


Version 4.0.0

Select an application from your LoginTC organization. Applications dictate which domain and policies are used.




Cisco ASA SSL VPN

Cisco ASA SSL VPN Example Inc. Secure Access




Fortinet FortiGate SSL VPN

Fortinet FortiGate SSL VPN Example Inc. Secure Access




Generic AD FS

Generic AD FS Example Inc. Secure Access



Generic RADIUS

Generic RADIUS Example Inc. Secure Access



Microsoft OWA

Configure the application:

16/44

LoginTC RADIUS Connector

Support
Log out

GENERAL

Endpoints / Create / LoginTC Application

Step 1 of 4
Back
Cancel

Endpoints
User Directories
Logs
Status

APPLIANCE
Settings

SETUP
Settings
Upgrade

Version 4.0.0

Generic RADIUS

Generic RADIUS
Example Inc. Secure Access

LoginTC Application

Application ID

3682ec813e2fd280032ad0cf57ec140923405391

The 40-character Application ID is found on the LoginTC Admin Panel Application page.

Application API Key

79EPAK5OgrVEK1p5D3po4n7mtCD23JdAqaAGPKLKcPHsLMHne2KRrDvdDI24D9V1

The 64-character Application API key is found on the LoginTC Admin Panel Application page.

Request Timeout

Request Timeout

60

The amount of time in seconds the LoginTC RADIUS Connector should poll for a user to respond. The value should be 10 seconds shorter than the timeout in your RADIUS client (e.g. VPN). For example if the VPN timeout is 90 seconds, this value should be no longer than 80 seconds.

IP Address

☒ Yes, send IP Address of the originating request when available
☐ No, do not send IP Address of originating request

RADIUS Attribute Name

Calling-Station-Id

The RADIUS attribute used by the VPN client to send the client IP Address.

Test
Next

Click Test before continuing.

Configuration values:


Property	Explanation
Application ID	The 40-character Application ID, retrieve Application ID
Application API Key	The 64-character Application API Key, retrieve Application API Key
Request Timeout	Number of seconds that the RADIUS connector will wait for

The Application ID and Application API Key are found on the [LoginTC Admin Panel](#).

Request Timeout

Make a note of what you set the Request Timeout to as you will need to use a larger timeout value in your RADIUS client. We recommend setting the Request Timeout value to 60 seconds in the LoginTC RADIUS Connector and setting the RADIUS authentication server timeout to 70 seconds in RADIUS Client. For more information see: [Recommended settings for an optimal user experience for VPN access](#)

Click **Test** to validate the values and then click **Next**:

 LoginTC RADIUS Connector

[Support](#) [Log out](#)

GENERAL

Endpoints

User Directories

Logs

Status

APPLIANCE

Settings

SETUP


Settings

Upgrade

Version 4.0.0

Endpoints / Create / LoginTC Application

Step 1 of 4 Back Cancel

 Generic RADIUS

Generic RADIUS

Generic RADIUS Example Inc. Secure Access

LoginTC Application

Application ID

3682ec813e2fd280032ad0cf57ec140923405391

The 40-character Application ID is found on the LoginTC Admin Panel Application page.

Application API Key

79EPAK5OgrVEk1p5D3po4n7mtCD23JdAqaAGPKLKcPHsLMHne2KRrDvdDI24D9V1

The 64-character Application API key is found on the LoginTC Admin Panel Application page.

Request Timeout

Request Timeout

60

The amount of time in seconds the LoginTC RADIUS Connector should poll for a user to respond. The value should be 10 seconds shorter than the timeout in your RADIUS client (e.g. VPN). For example if the VPN timeout is 90 seconds, this value should be no longer than 80 seconds.

IP Address

The IP Address will be shown to the end user prior to approving the request. The corresponding LoginTC domain will need to be configured with an IP Address domain attribute.

☒ Yes, send IP Address of the originating request when available

☐ No, do not send IP Address of originating request

RADIUS Attribute Name

Calling-Station-Id


The RADIUS attribute used by the VPN client to send the client IP Address.



Test Next

Test successful, click Next to continue.

User Directory

Configure the user directory to be used for first authentication factor in conjunction with LoginTC. You may use Active Directory / LDAP or an existing RADIUS server. You may also opt not to use a first factor, in which case LoginTC will be the only authentication factor.

 LoginTC RADIUS Connector

 Support  Log out

GENERAL

Endpoints

User Directories

Logs

Status

APPLIANCE

Settings

SETUP

Settings


Upgrade


Version 4.0.0


Endpoints / Create / User Directory

Step 2 of 4 Back Cancel


Select a user directory to leverage for username and password authentication

 **Active Directory**
Leverage your Active Directory.

 **Generic LDAP**
Leverage your LDAP server.

 **Generic RADIUS**
Leverage your RADIUS server.

or

 **Continue without a User Directory**
Users will not be challenged with password authentication. (Can be changed at any time)

Active Directory / Generic LDAP Option

Select **Active Directory** if you have an AD Server. For all other LDAP-speaking directory services, such as OpenDJ or OpenLDAP, select **Generic LDAP**:

19/44

LoginTC RADIUS Connector
 Support Log out

GENERAL

Endpoints

User Directories

Logs

Status

APPLIANCE

Settings

SETUP

Settings

Upgrade

Version 4.0.0

User Directories / Create / Configure Active Directory Server

Step 2 of 2

Back

Cancel

Connection Details

Name (optional)

Active Directory Server

Name of the Active Directory server.

IP Address or Host Name

The IP address or host name of the Active Directory Server.

Port (optional)

389

The default is 389 for LDAP and 636 for LDAPS (LDAP + SSL).

☒ No connection encryption

☐ SSL

☐ STARTTLS

Bind Details

How to authenticate against Active Directory to verify a username and password.

☒ Bind with credentials

☐ Anonymous

Bind DN

DN of an account with read access to the directory. Example: cn=admin,dc=example,dc=com.

Bind Password

The password for the above Bind DN account.

Query Details

Where and how to find relevant user entries.

Base DN

The top-level DN that usernames will be queried from. Example: dc=example,dc=com.

Configuration values:


Property	Explanation	Examples
host	Host or IP address of the LDAP server	ldap.example.com or 192.168.1.42
port (optional)	Port if LDAP server uses non-standard (i.e., 389/636)	4000
bind_dn	DN of a user with read access to the directory	cn=admin,dc=example,dc=com
bind_password	The password for the above bind_dn account	password
base_dn	The top-level DN that you wish to query from	dc=example,dc=com

Property	Explanation	Examples
<code>attr_username</code>	The attribute containing the user's username	<code>sAMAccountName</code> or <code>uid</code>
<code>attr_name</code>	The attribute containing the user's real name	<code>displayName</code> or <code>cn</code>
<code>attr_email</code>	The attribute containing the user's email address	<code>mail</code> or <code>email</code>
LDAP Group (optional)	The name of the LDAP group to be sent back to the authenticating server.	<code>SSLVPN-Users</code>
<code>encryption</code> (optional)	Encryption mechanism	<code>ssl</code> or <code>startTLS</code>
<code>cacert</code> (optional)	CA certificate file (PEM format)	<code>/opt/logintc/cacert.pem</code>

Click **Test** to validate the values and then click **Next**.

Existing RADIUS Server Option

If you want to use your existing RADIUS server, select **RADIUS**:

 LoginTC RADIUS Connector
 Support Log out

GENERAL

Endpoints

User Directories

Logs

Status

APPLIANCE

Settings

SETUP

Settings

Upgrade

Version 4.0.0

User Directories / Create / Configure RADIUS Server

Step 2 of 2

Back

Cancel

RADIUS Server Details

Name (optional)
Name of the RADIUS server.

IP Address or Host Name
The IP address or host name of the RADIUS Server.

Authentication Port
The authentication port of the RADIUS server.

Shared Secret
The RADIUS shared secret.

Test
Create

Click Test before continuing.

Configuration values:

Property	Explanation	Examples
IP Address or Host Name	Host or IP address of the RADIUS server	radius.example.com or 192.168.1.43
Authentication Port (optional)	Port if the RADIUS server uses non-standard (i.e., 1812)	1812
Shared Secret	The secret shared between the RADIUS server and the LoginTC RADIUS Connector	testing123

RADIUS Vendor-Specific Attributes

Common Vendor-Specific Attributes (VSAs) returned by the RADIUS server will be relayed.

Click **Test** to validate the values and then click **Next**.

Challenge Strategy / Passthrough

Configure which users will be challenged with LoginTC. This allows you to control how LoginTC will be phased in for your users. This flexibility allows for seamless testing and roll out.

The screenshot shows the LoginTC RADIUS Connector web interface. The top navigation bar includes the LoginTC logo, the text "LoginTC RADIUS Connector", and links for "Support" and "Log out". The left sidebar contains a menu with "GENERAL" (selected), "Endpoints", "User Directories", "Logs", "Status", "APPLIANCE" (with "Settings"), and "SETUP" (with "Settings" and "Upgrade"). The main content area is titled "Endpoints / Create / Challenge Strategy" and shows "Step 3 of 4". It includes "Back" and "Cancel" buttons. A yellow instruction box states: "Select which users should be challenges with LoginTC and which should bypass LoginTC". Three options are listed: 1. "Challenge All Users" (with a checkmark icon) and "All users will be challenged with LoginTC." 2. "Challenge Users Based on Static Username List" (with a document icon) and "Only users in a static username list will be challenged with LoginTC." 3. "Challenge Users Based on Group Membership" (with a group of people icon) and "Leverage Active Directory and LDAP Group Membership to determine which users are challenges with LoginTC and which users bypass LoginTC."

For example, with smaller or proof of concept deployments select the Static List option. Users on the static list will be challenged with LoginTC, while those not on the list will only be challenged with the configured First Authentication Factor. That means you will be able to

test LoginTC without affecting existing users accessing your VPN.

For larger deployments you can elect to use the Active Directory or LDAP Group option. Only users part of a particular LDAP or Active Directory Group will be challenged with LoginTC. As your users are migrating to LoginTC your LDAP and Active Directory group policy will ensure that they will be challenged with LoginTC. Users not part of the group will only be challenged with the configured First Authentication Factor.

Challenge All Users

Select this option if you wish every user to be challenged with LoginTC.

Challenge Users Based on Static Username List

Select this option if you wish to have a static list of users that will be challenged with LoginTC. Good for small number of users.

The screenshot shows the LoginTC RADIUS Connector web interface. The top navigation bar includes the LoginTC logo, 'LoginTC RADIUS Connector', and links for 'Support' and 'Log out'. The main content area is titled 'Endpoints / Create / Challenge Strategy' and indicates 'Step 3 of 4'. The left sidebar contains a menu with 'GENERAL', 'Endpoints', 'User Directories', 'Logs', 'Status', 'APPLIANCE', 'Settings', 'SETUP', 'Settings', and 'Upgrade'. The 'Endpoints' section is active, showing a 'Static Username List' configuration. The 'Challenge Users' section contains a text area for entering a newline-separated list of usernames. Below the text area, there is a 'Test' button and a 'Next' button. A yellow warning box at the bottom states 'Click Test before continuing.'

Static Username List

Only users in a static username list will be challenged with LoginTC.

Challenge Users

Enter a newline separated list of usernames that will be challenged with LoginTC. Users not in this list will bypass LoginTC. Example:

```
jane.doe
jane.smith
john.doe
john.smith
```

Test Next

Click Test before continuing.

LoginTC challenge users: a new line separated list of usernames. For example:

```
jane.doe
jane.smith
john.doe
john.smith
```

Challenge Users Based on Group Membership

Select this option if you wish to have only users part of a particular Active Directory or LDAP group to be challenged with LoginTC. Good for medium and large number of users.

The screenshot shows the 'Create / Challenge Strategy' configuration page in the LoginTC RADIUS Connector. The left sidebar contains navigation links for GENERAL, Endpoints, User Directories, Logs, Status, APPLIANCE, Settings, SETUP, and Version 4.0.0. The main content area is divided into three sections: 'Group Membership' with a note on precedence, 'Challenge Groups' with a text input field and example, and 'Bypass Groups' with a text input field and example. At the bottom, there are 'Test' and 'Next' buttons, and a yellow warning box that says 'Click Test before continuing.'

Configuration values:

Property	Explanation	Examples
Challenge Groups (Optional)	Comma separated list of groups for which users will be challenged with LoginTC	SSLVPN-Users or two-factor-users
Challenge Groups (Optional)	Comma separated list of groups for which users will always bypass LoginTC	NOMFA-Users

Click **Test** to validate the values and then click **Next**.

Client Settings

Configure RADIUS client (e.g. your RADIUS-speaking VPN):

LoginTC RADIUS Connector
 Support Log out

GENERAL

Endpoints

User Directories

Logs

Status

APPLIANCE

Settings

SETUP

Settings

Upgrade

Version 4.0.0

Endpoints / Create / Client Settings

Step 4 of 4

Back

Cancel

Generic RADIUS Details

Name (optional)

Generic RADIUS

Name for the endpoint.

IP Address

+

The IP Address or IPv4 CIDR Block of the Generic RADIUS. For example 192.168.0.1 or 192.168.0.0/16.

Shared Secret

The RADIUS shared secret.

Authentication Mode

Direct

Iframe

Challenge

Challenge Interactive

How the LoginTC authentication is performed

Send authentication request directly and automatically.

Client configuration values:

Property	Explanation	Examples
name	A unique identifier of your RADIUS client	CorporateVPN
IP Addresss	The IP address of your RADIUS client (e.g. your RADIUS-speaking VPN). Add additional IP Addresses by clicking plus .	192.168.1.44
Shared Secret	The secret shared between the LoginTC RADIUS Connector and its client	bigsecret

Under Authentication Mode select **Direct**

LoginTC RADIUS Connector

Support
Log out

GENERAL

Endpoints / Create / Client Settings

Step 4 of 4
Back
Cancel

Endpoints
User Directories
Logs
Status

APPLIANCE
Settings

SETUP
Settings
Upgrade

Version 4.0.0

Generic RADIUS Details

Name (optional)

Generic RADIUS

Name for the endpoint.

IP Address

The IP Address or IPv4 CIDR Block of the Generic RADIUS. For example 192.168.0.1 or 192.168.0.0/16.

Shared Secret

The RADIUS shared secret.

Authentication Mode

☒ Direct
☐ Iframe
☐ Challenge
☐ Challenge Interactive

How the LoginTC authentication is performed

Send authentication request directly and automatically.

The LoginTC RADIUS Connector will directly and automatically perform the LoginTC second factor. See [User Experience](#) for more information.

Click **Test** to validate the values and then click **Save**.

LoginTC RADIUS Connector

Support
Log out

GENERAL

Endpoints

+ Create Endpoint

Endpoints
User Directories
Logs
Status

APPLIANCE
Settings

SETUP
Settings
Upgrade

Version 4.0.0

Endpoints are application and network boundaries where users authenticate

Successfully created endpoint.

Generic RADIUS

Generic RADIUS (11.1.1.1)

Generic RADIUS
Example Inc. Secure Access

Testing

When you are ready to test your configuration, create a LoginTC user (if you haven't already done so). The username should match your existing user. Provision a token by following the steps:

1. In a new tab / window log into the LoginTC Admin Panel
2. Click **Domains**
3. Click on your domain
4. Click on **Members**

GENERAL

- Dashboard
- Users
- Applications
- Policies
- Groups
- Bypass Codes
- Devices
- Phones
- Hardware Tokens
- User Logs

SETUP

- Domains**
- Administrators
- Admin Logs

Domains / Example Inc. Secure Access + Create Member Members Settings

Members

Example Inc. Secure Access has 88 member(s)

+ Create Member View Members

Attributes

Example Inc. Secure Access doesn't have any domain attributes yet. [Learn more.](#)

+ Create Domain Attribute

Latest Actions

Action	User	Device/Phone	Domain	Group	Date
APPROVE_REQUEST_TEST	john.doe	IOS-4f6aa853	Example Inc. Secure Access		4 seconds ago
CREATE_REQUEST	john.doe	IOS-4f6aa853	Example Inc. Secure Access		15 seconds ago

5. Click **Issue Token** button beside your user:

GENERAL

- Dashboard
- Users
- Applications
- Policies
- Groups
- Bypass Codes
- Devices
- Phones
- Hardware Tokens
- User Logs

SETUP

- Domains**
- Administrators
- Admin Logs

Domains / Example Inc. Secure Access / Members + Create Member Settings

State Any Filter Search keywords... Search

+ Issue New Token Revoke Token Remove from Domain

Perform bulk action on 0 selected users

<input type="checkbox"/>	Username	State	Activation Code	Actions
<input type="checkbox"/>	john.doe	Inactive		+ Issue Token

6. A 10-character alphanumeric activation code will appear beside the user:

The screenshot shows the LoginTC web interface. The top navigation bar includes the LoginTC logo, 'Example Inc. Business', and links for 'Docs', 'Support', and 'administrator@example.com'. The left sidebar contains a 'GENERAL' section with links to Dashboard, Users, Applications, Policies, Groups, Bypass Codes, Devices, Phones, Hardware Tokens, and User Logs. Below this is a 'SETUP' section with links to Domains, Administrators, and Admin Logs. The main content area is titled 'Domains / Example Inc. Secure Access / Members' and includes a '+ Create Member' button and a 'Settings' button. A search bar is present with the text 'Search keywords...' and a 'Search' button. Below the search bar are three buttons: 'Issue New Token', 'Revoke Token', and 'Remove from Domain'. A message states 'Perform bulk action on 0 selected users'. A table displays user information:



<input type="checkbox"/>	Username	State	Activation Code	Actions
<input type="checkbox"/>	john.doe	Pending	HURRMUGUVH	✕ Revoke Token

7. Open the LoginTC mobile app.


8. Enter the 10-character alphanumeric activation code:

The screenshot shows the LoginTC mobile app interface. The top status bar displays 'No SIM', signal strength, time '2:28 PM', and battery level. The app header is blue with 'Cancel', 'Add Token', and 'Next' buttons. The main content area is titled 'Step 1 of 3: Enter Activation Code'. Below the title, the activation code 'HURRMUGUVH' is displayed. A text box contains the following message: 'The 10-character alphanumeric activation code is supplied by your LoginTC-enabled service provider. If you don't already have an activation code, ask your administrator to issue you one.' Below the text box is a keyboard with the following keys: Q, W, E, R, T, Y, U, I, O, P; A, S, D, F, G, H, J, K, L; an arrow key, Z, X, C, V, B, N, M, and a backspace key; 123, a globe icon, a microphone icon, a space key, and a 'Next' button.

9. Load the token to complete the process

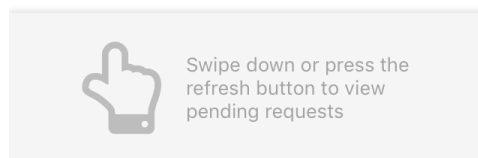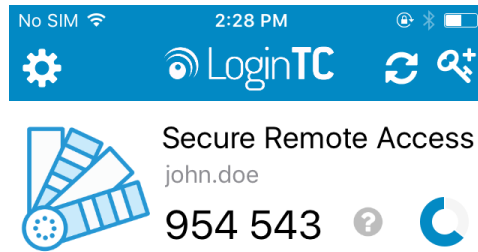

When you have loaded a token for your new user and domain, navigate to your appliance **web interface** URL:

 LoginTC RADIUS Connector

[Support](#) [Log out](#)

GENERAL

Endpoints

User Directories

Logs

Status

APPLIANCE

Settings

SETUP

Settings

Upgrade

Version 4.0.0

Endpoints / Generic RADIUS

Test EndpointDelete


Read the Generic RADIUS [Documentation](#) to integrate your Generic RADIUS application with LoginTC.

Endpoint


Endpoint NameGeneric RADIUS

Edit

LoginTC Application

Application NameGeneric RADIUS 

Application ID3682ec813e2fd280032ad0cf57ec140923405391

DomainExample Inc. Secure Access 

Request Timeout60

IP Address

☒ Yes, send IP Address of the originating request when available

☐ No, do not send IP Address of originating request

Edit

Click **Test Configuration**:

Test Endpoint

Test actual simulated request for the Endpoint. All LoginTC authentication is identical to what a user would receive in a live authentication scenario. Passthrough configuration also applies.

Username

Password

Close **Test Endpoint**

LoginTC Application

Application Name Generic RADIUS

Application ID 3682ec813e2fd280032ad0cf57ec140923405391

Domain Example Inc. Secure Access


Request Timeout 60

IP Address ☒ Yes, send IP Address of the originating request when available
☐ No, do not send IP Address of originating request

Edit

Enter a valid username and password; if there is no password leave it blank. A simulated authentication request will be sent to the mobile or desktop device with the user token loaded. Approve the request to continue:

Test Endpoint



The test with john.doe **APPROVED** [See logs](#)

Try Again **Close**

LoginTC Application


Application Name Generic RADIUS

Application ID 3682ec813e2fd280032ad0cf57ec140923405391


Edit

Congratulations! Your appliance can successfully broker first and second factor authentication. The only remaining step is to configure your RADIUS device!

If there was an error during testing, the following will appear:

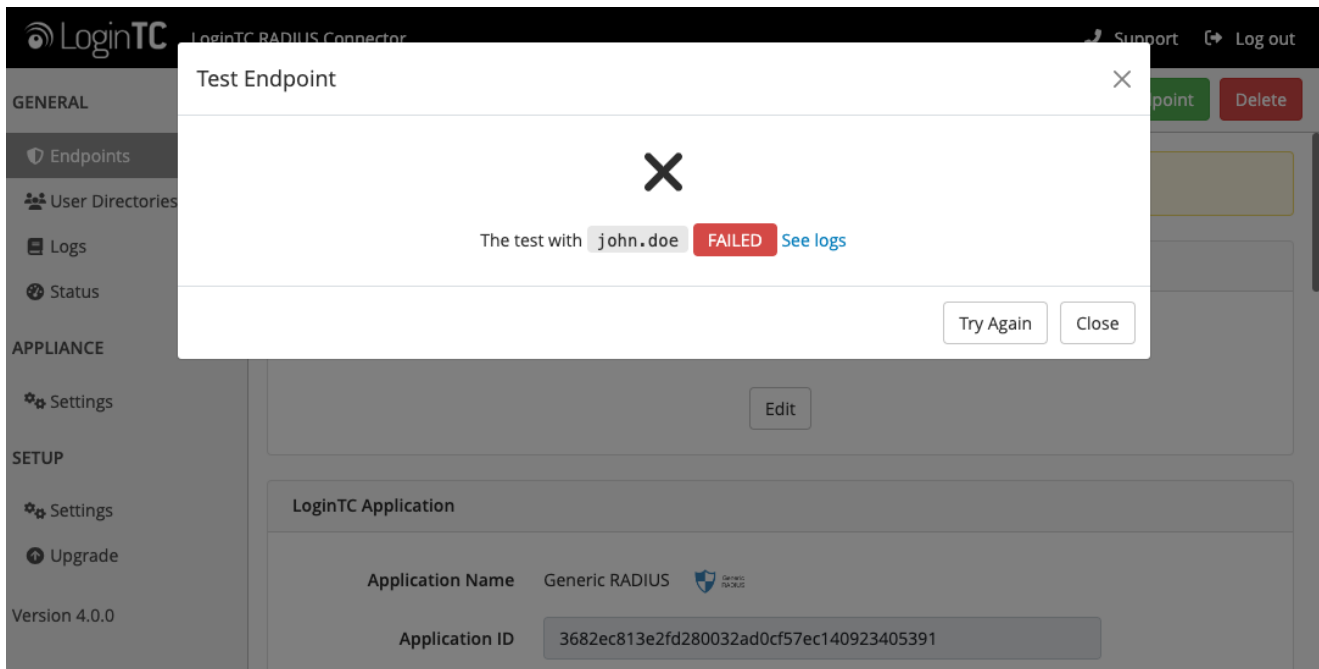

In this case, click **See logs** (or click the **Logs** section):

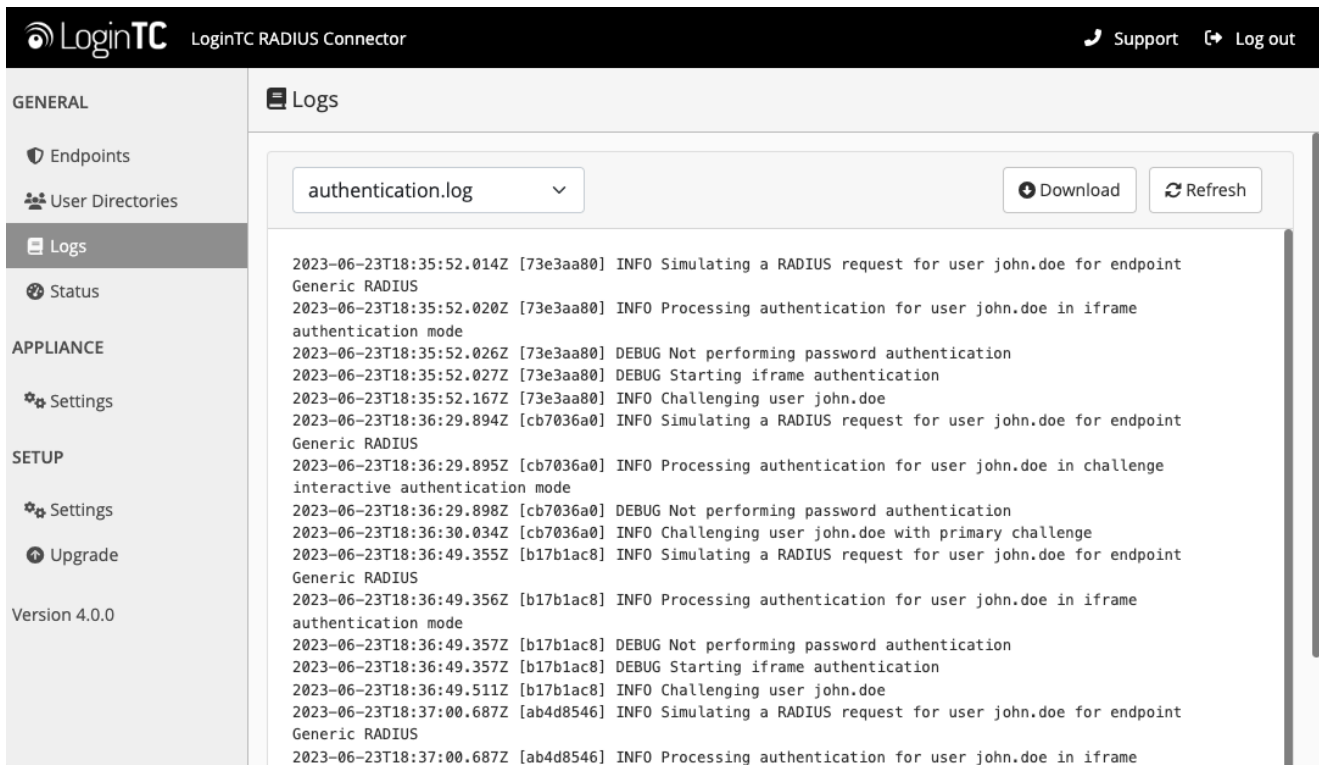

Cisco ASA Configuration – Quick Guide

Once you are satisfied with your setup, configure your Cisco ASA client to use the LoginTC RADIUS Connector.

For your reference, the appliance **web interface Settings** page displays the appliance IP address and RADIUS port:

The screenshot shows the LoginTC RADIUS Connector web interface. The top header bar is black with the LoginTC logo and 'LoginTC RADIUS Connector' on the left, and 'Support' and 'Log out' links on the right. A left sidebar contains navigation links: 'GENERAL' (Endpoints, User Directories, Logs, Status), 'APPLIANCE' (Settings), and 'SETUP' (Settings, Upgrade). The 'Settings' link under 'APPLIANCE' is highlighted. The main content area is titled 'Settings' and contains two sections: 'RADIUS Details' and 'NTP Server'. The 'RADIUS Details' section shows 'IP Address' as 172.20.221.85 and 'RADIUS Authentication Port' as 1812. The 'NTP Server' section shows 'Enabled' with radio buttons for 'Yes' and 'No' (selected), and a message 'NTP is not enabled.' with an 'Edit' button.

RADIUS Details	
IP Address	172.20.221.85
RADIUS Authentication Port	1812

NTP Server	
Enabled	<input type="radio"/> Yes <input checked="" type="radio"/> No
NTP is not enabled.	
<button>Edit</button>	

The following are quick steps to protect your IPsec VPN setup with LoginTC.

1. Launch your Cisco ASA ASDM

2. Click **AAA Local Users**:

The screenshot shows the Cisco ASDM 6.4 for ASA - 192.168.1.1 interface. The left sidebar displays the configuration tree with 'AAA Local Users' selected. The main pane shows the 'AAA Server Groups' configuration page. The 'AAA Server Groups' table lists two groups: 'LOCAL' and 'LoginTC'. The 'LoginTC' group is selected, and its details are shown in the 'Servers in the Selected Group' table. The 'LDAP Attribute Map' section is also visible at the bottom.

AAA Server Groups

Server Group	Protocol	Accounting Mode	Reactivation Mode	Dead Time	Max Failed Attempts
LOCAL	LOCAL				
LoginTC	RADIUS	Single	Depletion	10	1


Servers in the Selected Group

Server Name or IP Address	Interface	Timeout
192.168.1.7	inside	60

LDAP Attribute Map

Configuration changes saved successfully.

3. Under **AAA Server Groups** click **Add**:

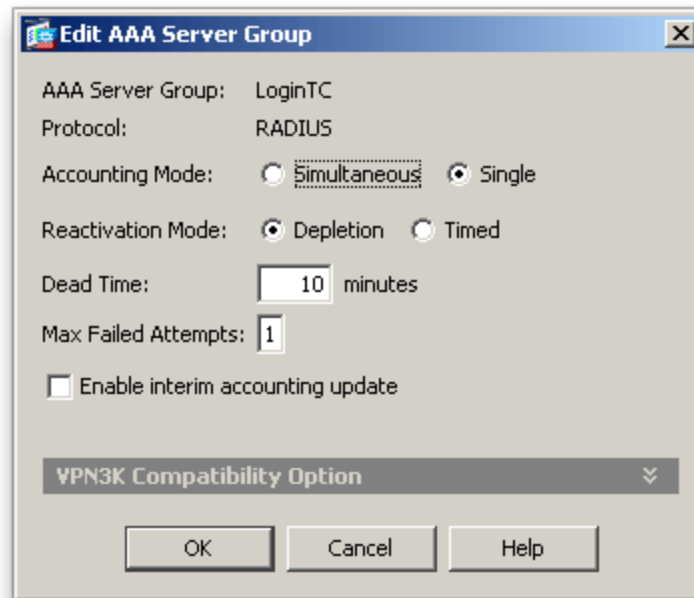

Property	Explanation	Example
Accounting Mode	Indicates how accounting messages are sent. Recommended single mode.	single mode
Reactivation Mode	Specifies the method by which failed servers are reactivated.	depleted
Dead Time	Time for which a RADIUS server is skipped over by transaction requests	10
Max Failed Attempts	Maximum number of retransmission attempts. Recommended 1.	1

4. Select **Protocol**: RADIUS

5. Click **Add**

6. Select the newly created group

7. Under **Servers in the Selected Group** click **Add**:

Edit AAA Server

Server Group: LoginTC

Interface Name: outside

Server Name or IP Address: 10.0.10.162

Timeout: 70 seconds

RADIUS Parameters

Server Authentication Port: 1812

Server Accounting Port: 1813

Retry Interval: 5 seconds

Server Secret Key: *****

Common Password:

ACL Netmask Convert: Standard

Microsoft CHAPv2 Capable: ☐

SDI Messages


Message Table

OK Cancel Help

Property	Explanation	Example
Interface Name	Name of protected Cisco interface	inside
Server name or IP Address	Address of your LoginTC RADIUS Connector	192.168.1.7
Timeout	Authentication timeout. We recommend 70 seconds if you set the LoginTC Request timeout to 60 seconds.	70
Server Authentication Port	RADIUS authentication port. Must be 1812.	1812
Server Accounting Port	RADIUS accounting port. Must be 1813.	1813
Retry Interval	Length of time between retries	5

Property	Explanation	Example
Server Secret Key	The secret shared between the LoginTC RADIUS Connector and its client	bigsecret
Microsoft CHAPv2 Capable	Whether or not the RADIUS server uses CHAPv2. Must be unchecked	

8. Click IPsec (IKEv1) Connection Profiles

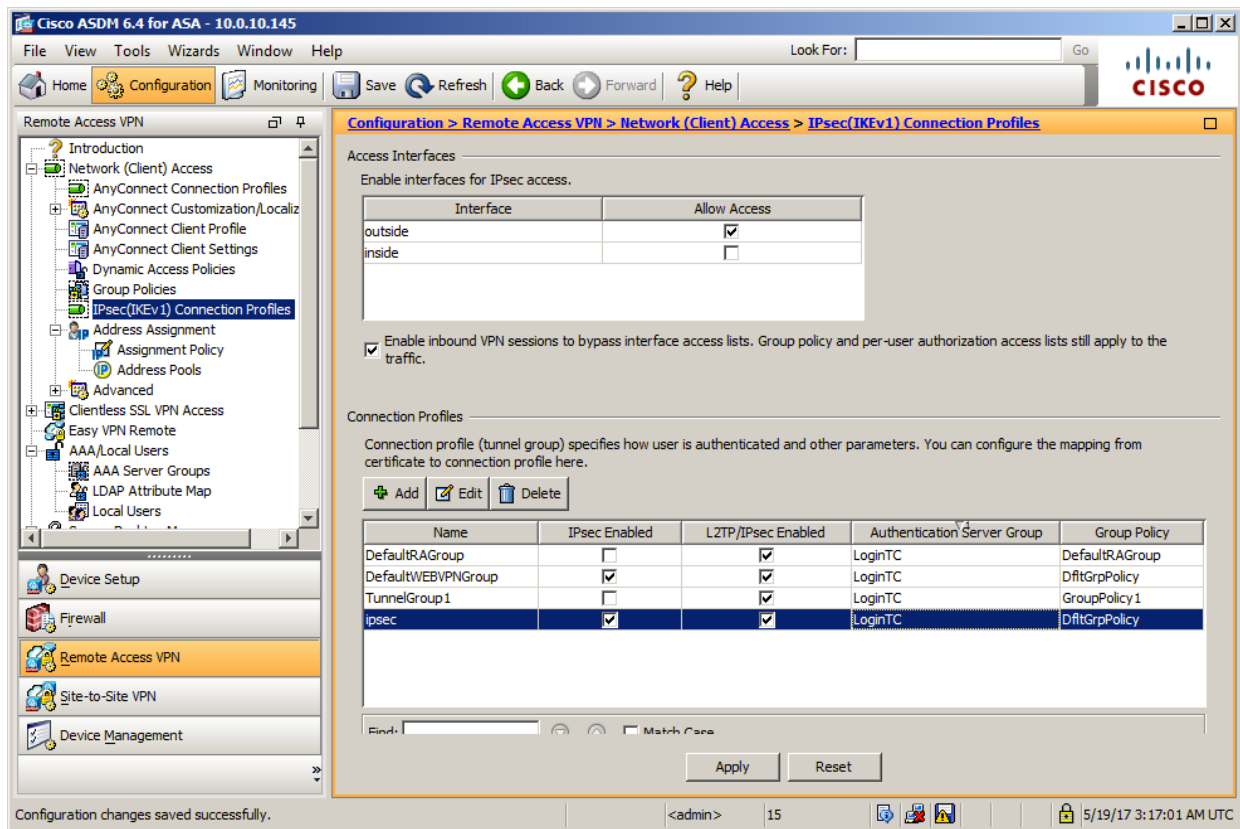

9. Click **Connection Profiles**:

10. Select your existing IPsec Connection Profile, click **Edit**:

Note: Connection Profile Management

You can also create a new Connection Profile in order to not affect your existing configuration. The new Connection Profile can be used for testing purposes

>

11. Click the **Basic** tab on the left

Edit IPsec Remote Access Connection Profile: ipsec

Basic
Advanced

Name: ipsec

IKE Peer Authentication
Pre-shared Key: *****
Identity Certificate: -- None -- Manage...

User Authentication
Server Group: LoginTC Manage...
Fallback: ☐ Use LOCAL if Server Group fails

Client Address Assignment
DHCP Servers:
Client Address Pools: Select...

Default Group Policy
Group Policy: DfltGrpPolicy Manage...
(Following fields are attributes of the group policy selected above.)
☒ Enable IPsec protocol
☒ Enable L2TP over IPsec protocol


Find:
Next Previous

OK Cancel Help

12. Under **IKE Peer Authentication** enter a Pre-shared Key (PSK). The key is used to secure data sent between IPsec peers and must be entered in each user's VPN client. Pick a cryptographically strong PSK.

13. Under **User Authentication** for the **Server Group** select the group made in steps 3-5

14. Expand the **Advanced** tab on the left and click **PPP**

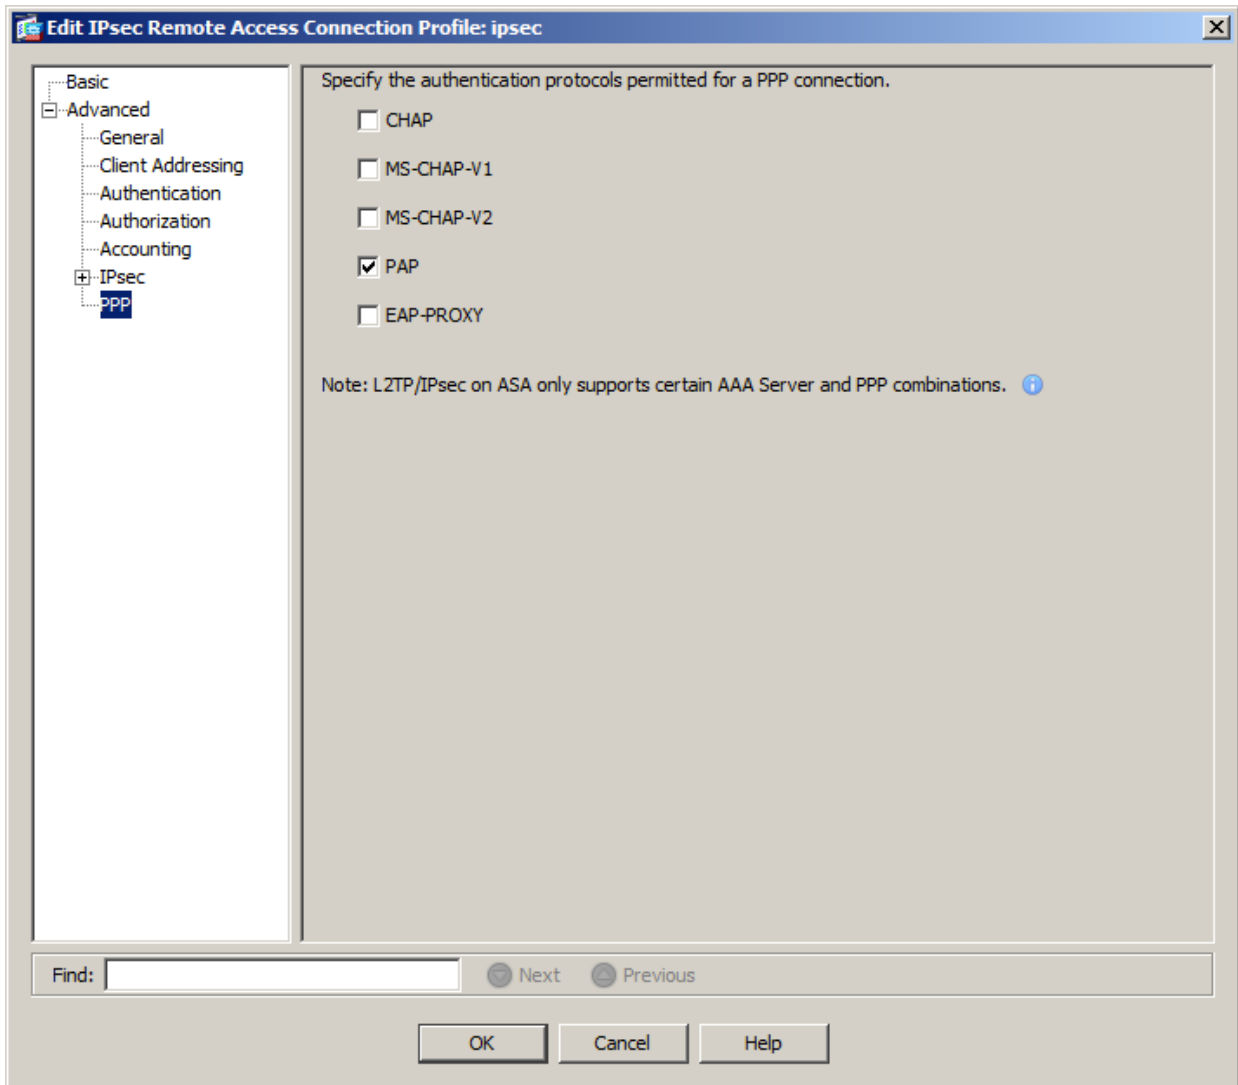

15. Ensure only **PAP** is selected

16. Click **OK**

To test, configured your IPsec client to use the newly configured Connection Profile.

User Management

There are several options for managing your users within LoginTC:

- Individual users can be added manually in [LoginTC Admin Panel](#)
- Bulk operations using [CSV Import](#)
- Programmatically manage user lifecycle with the [REST API](#)
- One-way user synchronization of users to the LoginTC Admin is performed using [User Sync Tool](#).

Logging

Logs can be found on the **Logs** tab:

LoginTC RADIUS Connector

Support
Log out

GENERAL

Endpoints
User Directories
Logs
Status

APPLIANCE
Settings

SETUP
Settings
Upgrade

Version 4.0.0

Logs

authentication.log
Download
Refresh

```

2023-06-23T18:35:52.014Z [73e3aa80] INFO Simulating a RADIUS request for user john.doe for endpoint Generic RADIUS
2023-06-23T18:35:52.020Z [73e3aa80] INFO Processing authentication for user john.doe in iframe authentication mode
2023-06-23T18:35:52.026Z [73e3aa80] DEBUG Not performing password authentication
2023-06-23T18:35:52.027Z [73e3aa80] DEBUG Starting iframe authentication
2023-06-23T18:35:52.167Z [73e3aa80] INFO Challenging user john.doe
2023-06-23T18:36:29.894Z [cb7036a0] INFO Simulating a RADIUS request for user john.doe for endpoint Generic RADIUS
2023-06-23T18:36:29.895Z [cb7036a0] INFO Processing authentication for user john.doe in challenge interactive authentication mode
2023-06-23T18:36:29.898Z [cb7036a0] DEBUG Not performing password authentication
2023-06-23T18:36:30.034Z [cb7036a0] INFO Challenging user john.doe with primary challenge
2023-06-23T18:36:49.355Z [b17b1ac8] INFO Simulating a RADIUS request for user john.doe for endpoint Generic RADIUS
2023-06-23T18:36:49.356Z [b17b1ac8] INFO Processing authentication for user john.doe in iframe authentication mode
2023-06-23T18:36:49.357Z [b17b1ac8] DEBUG Not performing password authentication
2023-06-23T18:36:49.357Z [b17b1ac8] DEBUG Starting iframe authentication
2023-06-23T18:36:49.511Z [b17b1ac8] INFO Challenging user john.doe
2023-06-23T18:37:00.687Z [ab4d8546] INFO Simulating a RADIUS request for user john.doe for endpoint Generic RADIUS
2023-06-23T18:37:00.687Z [ab4d8546] INFO Processing authentication for user john.doe in iframe

```

Troubleshooting

Not Authenticating

If you are unable to authenticate, navigate to your appliance **web interface** URL and click **Status**:

LoginTC RADIUS Connector

Support
Log out

GENERAL

Endpoints
User Directories
Logs
Status

APPLIANCE
Settings

SETUP
Settings
Upgrade

Version 4.0.0

Status

All status checks have passed

Connectivity to cloud.logintc.com
Passed


CPU Usage
Passed

RAM Usage
Passed

Disk Space
Passed

40/44

Ensure that all the status checks pass. For additional troubleshooting, click **Logs**:

 LoginTC RADIUS Connector

Support Log out

GENERAL

Endpoints

User Directories

Logs

Status

APPLIANCE

Settings

SETUP

Settings

Upgrade

Version 4.0.0

Logs

authentication.log

Download Refresh

2023-06-23T18:35:52.014Z [73e3aa80] INFO Simulating a RADIUS request for user john.doe for endpoint Generic RADIUS

2023-06-23T18:35:52.020Z [73e3aa80] INFO Processing authentication for user john.doe in iframe authentication mode

2023-06-23T18:35:52.026Z [73e3aa80] DEBUG Not performing password authentication

2023-06-23T18:35:52.027Z [73e3aa80] DEBUG Starting iframe authentication

2023-06-23T18:35:52.167Z [73e3aa80] INFO Challenging user john.doe

2023-06-23T18:36:29.894Z [cb7036a0] INFO Simulating a RADIUS request for user john.doe for endpoint Generic RADIUS

2023-06-23T18:36:29.895Z [cb7036a0] INFO Processing authentication for user john.doe in challenge interactive authentication mode

2023-06-23T18:36:29.898Z [cb7036a0] DEBUG Not performing password authentication

2023-06-23T18:36:30.034Z [cb7036a0] INFO Challenging user john.doe with primary challenge

2023-06-23T18:36:49.355Z [b17b1ac8] INFO Simulating a RADIUS request for user john.doe for endpoint Generic RADIUS

2023-06-23T18:36:49.356Z [b17b1ac8] INFO Processing authentication for user john.doe in iframe authentication mode

2023-06-23T18:36:49.357Z [b17b1ac8] DEBUG Not performing password authentication

2023-06-23T18:36:49.357Z [b17b1ac8] DEBUG Starting iframe authentication

2023-06-23T18:36:49.511Z [b17b1ac8] INFO Challenging user john.doe

2023-06-23T18:37:00.687Z [ab4d8546] INFO Simulating a RADIUS request for user john.doe for endpoint Generic RADIUS

2023-06-23T18:37:00.687Z [ab4d8546] INFO Processing authentication for user john.doe in iframe

Email Support


For any additional help please email support@cyphercor.com. Expect a speedy reply.

Upgrading


From 4.X

The latest LoginTC RADIUS Connector upgrade package can be downloaded here:
[Download RADIUS Connector \(Upgrade\)](#)


1. Navigate to **SETUP > Upgrade**:

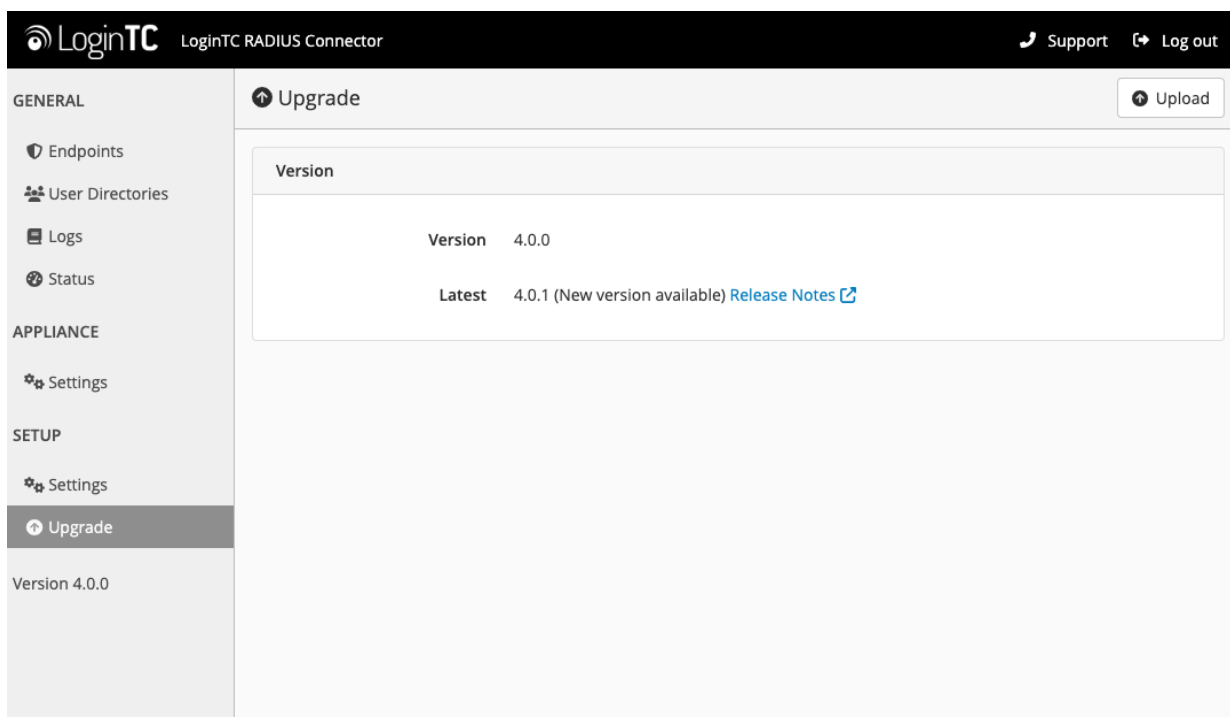


2. Click **Upload** and select your LoginTC RADIUS Connector upgrade file:

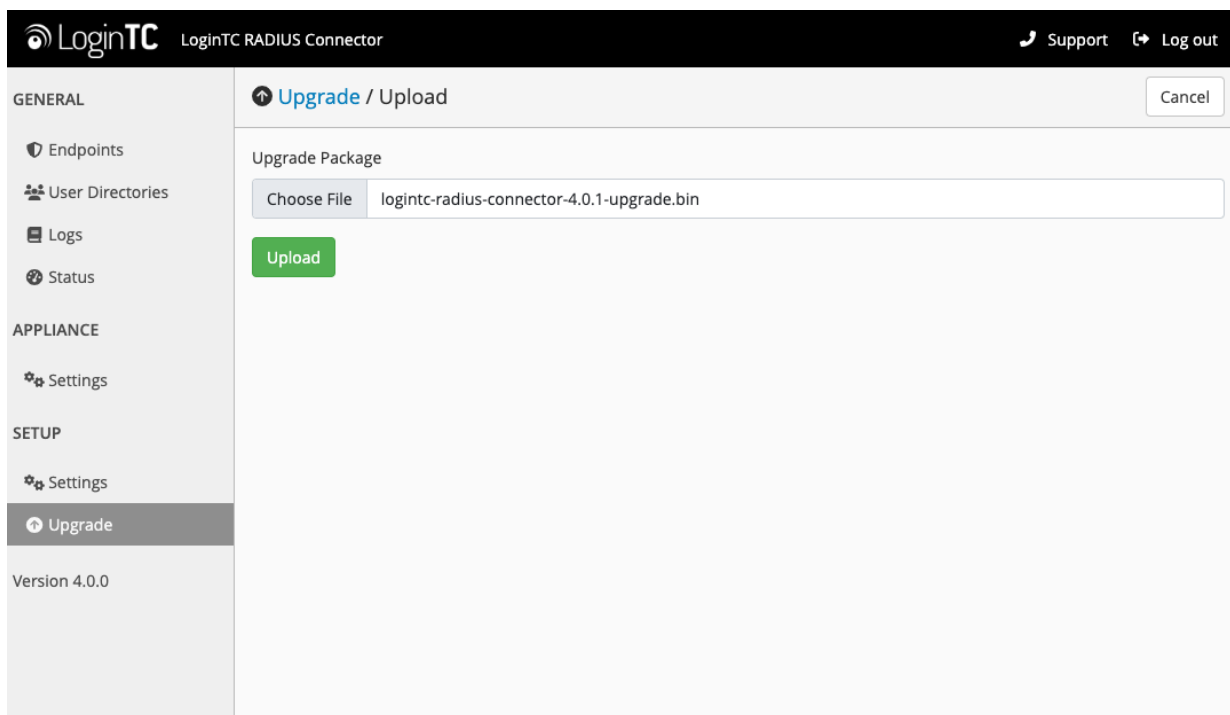


3. Click **Upload** and do not navigate away from the page:

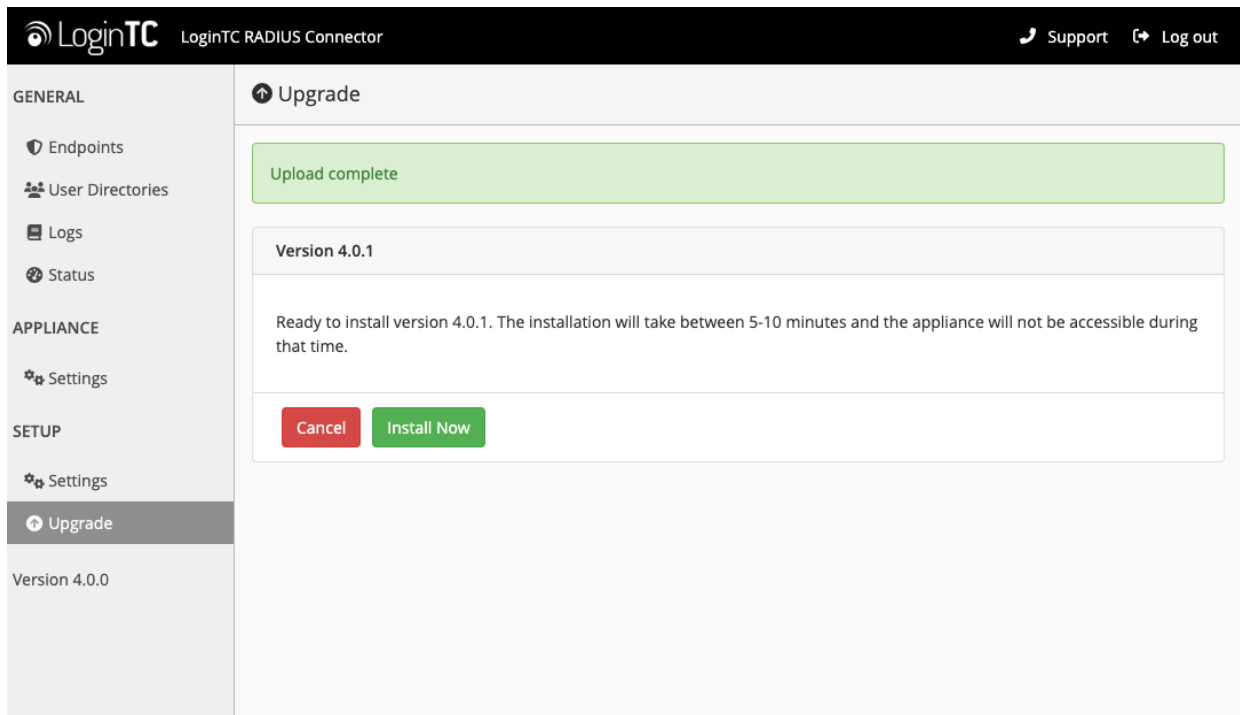

4. Once upload is complete upgrade by clicking **Install Now**:

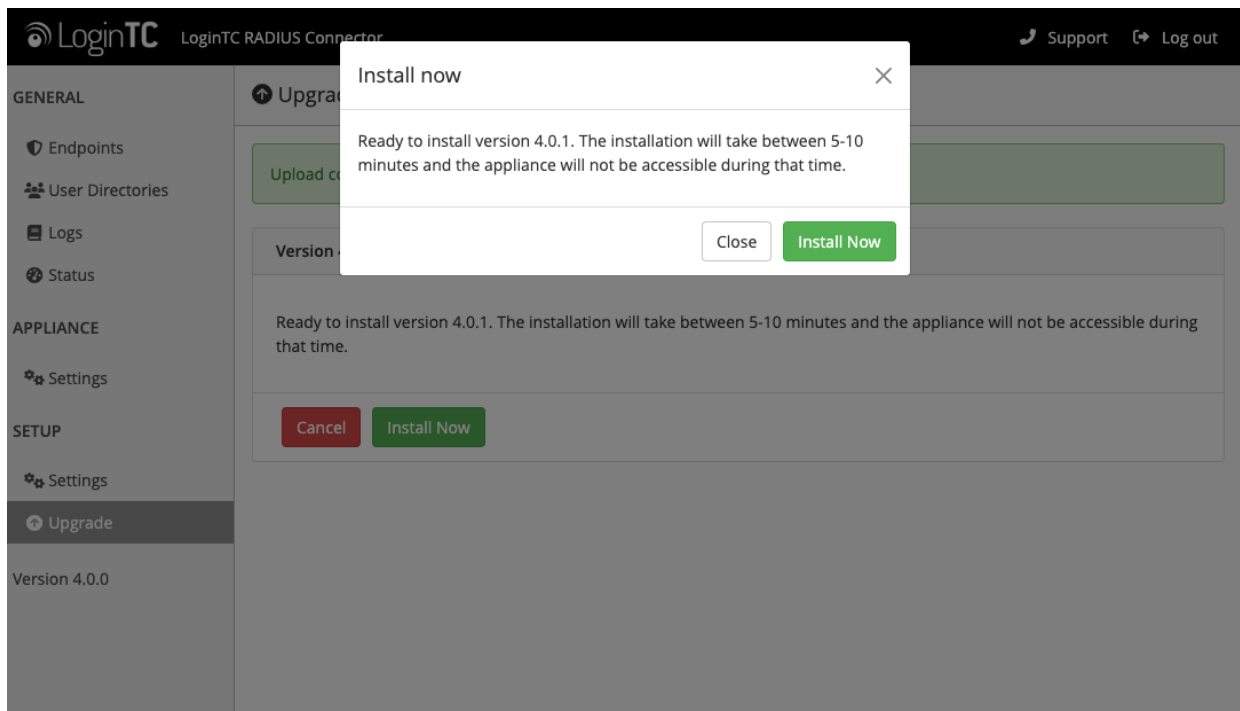

5. Wait 10-15 minutes for upgrade to complete:

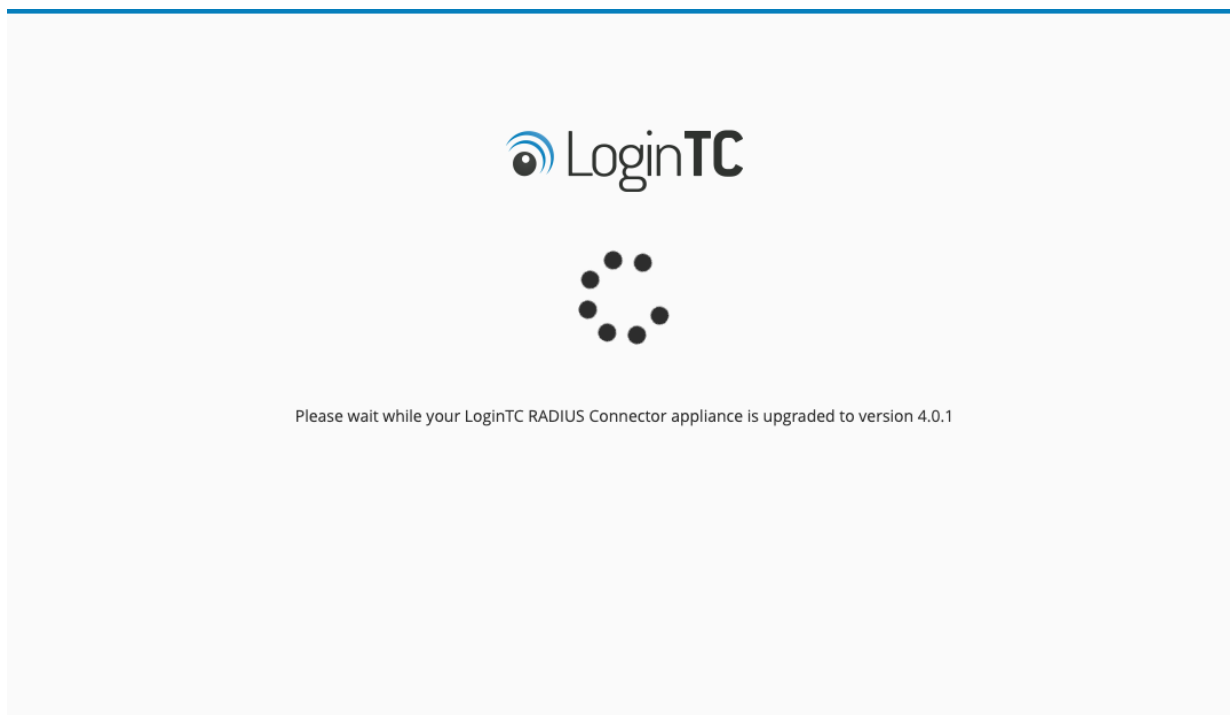

NOTE: Upgrade time

Upgrade can take 10-15 minutes, please be patient.

From 3.X

Important: LoginTC RADIUS Connector 3.X End-of-life

The LoginTC RADIUS Connector 3.X virtual appliance is built with CentOS 7.9. CentOS 7.X is End of Lifetime (EOL) June 30th, 2024. See [CentOS Product Specifications](#). Although the appliance will still function it will no longer receive updates and nor will it be officially supported.

New LoginTC RADIUS Connector 4.X

A new LoginTC RADIUS Connector 4.X virtual appliance has been created. The Operating System will be supported for many years. Inline upgrade is not supported. As a result upgrade is deploying a new appliance. The appliance has been significantly revamped and although the underlying functionality is identical, it has many new features to take advantage of.

Complete 3.X to 4.X upgrade guide: [LoginTC RADIUS Connector Upgrade Guide](#)